



MAJOR STEPS OF THE TRAFFIC SWITCH

The switch is necessary to complete the final phase of the project.


- 1 As crews finalize the North Phase, workers must remove traffic control devices throughout the construction zone. In the days leading up to the switch, crews will be removing the concrete barriers, resulting in various single lane closures in both Upvalley and Downvalley directions.

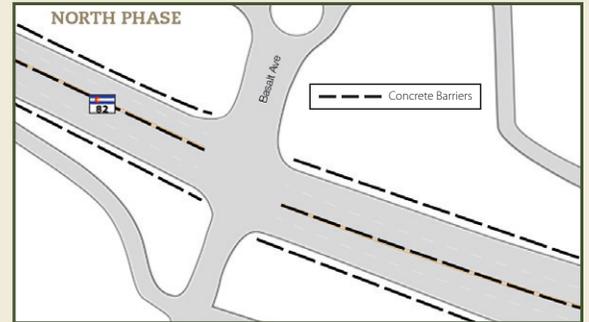

- 2 For the first portion of the switch, crews will move the Downvalley traffic to the North side of the project. The center of Colorado Highway 82 will be unusable at this time. This alignment will be in place overnight for up to two days.

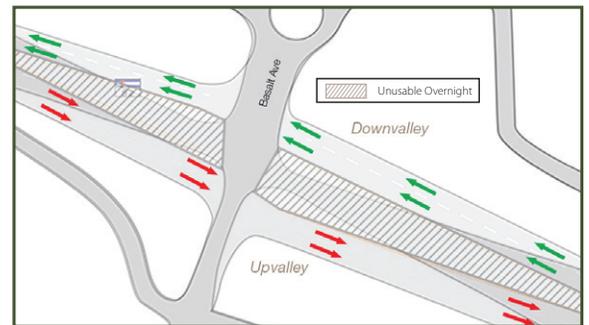

- 3 To finalize the switch, crews will move Upvalley traffic to the North. Motorists will then be traveling in a head-to-head configuration, with concrete barriers dividing the traffic flow. This alignment will remain in place until the project is complete.

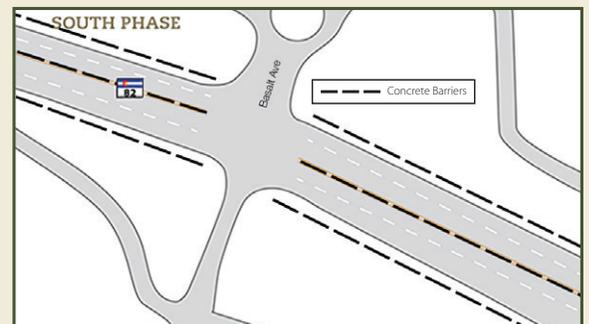

The Pedestrian Underpass Project

The project, located at the intersection of Colorado Highway 82 and Basalt Avenue, will undergo a traffic shift the week of March 13th, 2017. The new traffic alignment will shift the Highway to the north, allowing construction crews to begin on the last phase.

As of early March, the project is estimated to be 40% complete. Crews are confident that the underpass will be fully functional by mid-August and open for public use by the start of the new school year. Full completion is on schedule for late October.



Phone: 970-718-5818

Email:

Basalt@PublicInfoTeam.com

Web: www.basalt.net

March 2017